




**DUAL RESISTANCE**  
AGAINST BURGLARY  
AND FIRE FOR  
**INCREASED**  
PROTECTION

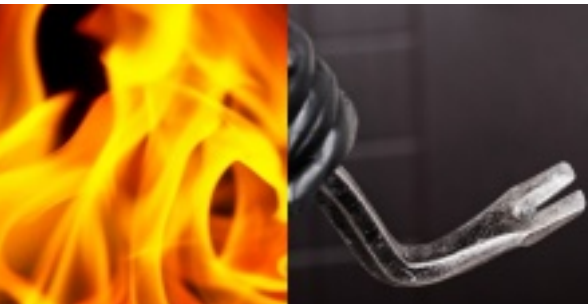

# DUOGUARD

BURGLARY- & FIRE-RESISTANT PROTECTION




## KEY FEATURES

- Combined resistance against burglary and fire, ideal for office and retail environments
- Certified by ECB•S according to EN 1143-1, Grade I for burglary protection
- Certified by ECB•S according to EN 1147-1 for fire protection of documents for up to 60 minutes
- Ergonomic soft-touch handle for comfort in use
- Dualite new composite barrier-material to ensure dual protection while reducing total weight to minimise transport and installation cost
- Three-way solid steel boltwork, active relocker and anti-drilling plates for enhanced security
- Maximised storage capacity with customisable capabilities
- Lock alternatives: EN 1300- certified Class A key lock and/or EN1300-certified Class B electronic lockChoice of 7 sizes from 40 to 443 litres
- Optional internal fittings: removable shelf, extendable shelf, lockable drawer, lockable compartment, extensible tray, file frame. Data media insert certified 60 Diskette by NT Fire 017 for up to 60 minutes fire protection.

# DUOGUARD

## PRODUCT SPECIFICATIONS

Model	External height (mm)	External width (mm)	External depth (mm)	Internal height (mm)	Internal width (mm)	Internal depth (mm)	Volume (litres)	Weight (kg)	Internal Fittings
40	435	500	456	335	400	295	40	90	1 shelf
60	530	500	521	430	400	360	62	115	1 shelf
110	690	600	561	590	500	386	114	161	2 shelves
150	875	600	561	775	500	386	150	196	2 shelves
200	1150	600	561	1050	500	386	203	243	2 shelves
350	1600	675	585	1500	575	410	354	352	3 shelves
450	1850	675	615	1750	575	440	443	415	4 shelves

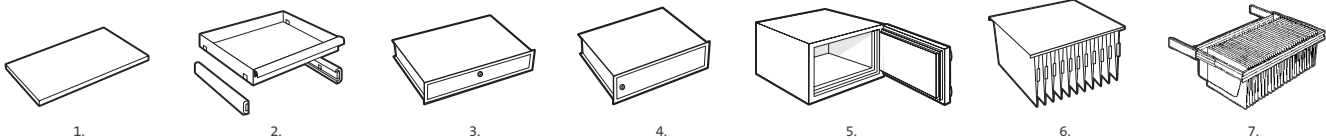

### INTERNAL FITTINGS

1. Shelf 2. Extendable shelf 3. Extensible drawer  
 4. Lockable drawer 5. Data media insert  
 6. Shelf for hanging files (size 110 and above)  
 7. Suspension file frame

### LOCK OPTIONS

As the primary locking option, DuoGuard safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A). Dual locking is available from model 110 and up. The primary lock can be supplemented by a combination lock or both a key lock and electronic lock can be fitted. All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard. DuoGuard's high-security electronic lock – certified Class B by ECB•S – includes the following features:

- 1 master code, 1 supervisor code and 7 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened. Also equipped with time-delay override.
- Protective function to raise silent alarm if lock is being opened under duress.

### FIRE TESTING

DuoGuard has been approved in accordance with the European standard, EN 1047-1 in fire class S 60 P, which means the safe will protect paper documents for one hour. This certification was awarded by ECB•S (European Certification Board•Security Systems).

#### STAGE 1

The cabinet is placed in a furnace and heated to a temperature of almost 1000°C for 60 minutes to simulate the effects of a severe fire.

#### STAGE 2

The cabinet is removed from the furnace and cooled. When opened, the inner temperature of the cabinet must not exceed 150°C.

### BURGLARY TESTING

DuoGuard has been approved by ECB•S in accordance with the European EN 1143-1 standard for burglary protection in Grades 0 and I.

A range of attack tools were used to test DuoGuard's level of resistance, ranging from basic tools to sophisticated thermal and electrical equipment.

Toll Free Phone: 1800 450 777

[www.chubbsafes.com.au](http://www.chubbsafes.com.au)